




## DECK CONNECTOR

- 1) Unscrew the housing into two pieces

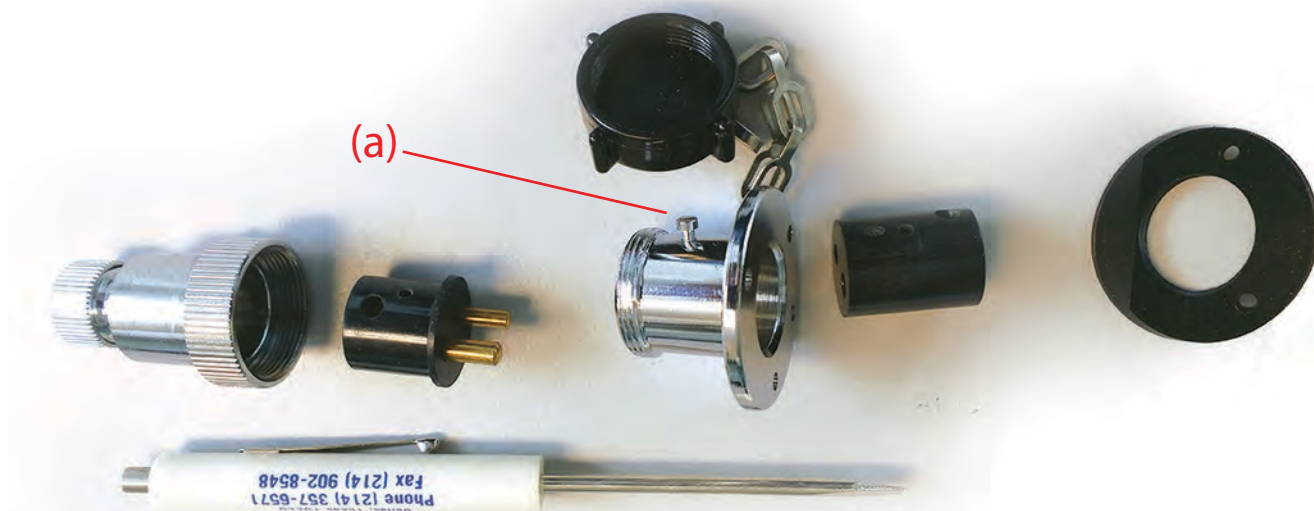

- 2) Use a small straight screw driver to remove the set screw (a) on each half of the housing. The plastic inserts should then push out easily.
- 3) Next insert the wires in the the inserts. Tighten the wire set screws. Then assemble back together.