

INSTRUCTIONS


1. Remove Flushing Port Plug
2. Install Supplied Washer Into Flushing Port
3. Tighten Quick Flush Valve Into Flushing Port
4. Tighten Snugly (OMC Engine Only: Inspection Steam Hole Should Be Pointing Downward And Angled Toward Drivers Side)
5. Attach Quick Flush Hose Connect To Garden Hose
6. Snap Connector Onto Quick Flush Valve
7. Turn On Water And Flush For At Least 5 Minutes
8. Do Not Operate Engine With Quick Flush Unless Manual Allows

INSTRUCTIONS

1) Remove plug from flushing port

2) Replace original "O" ring with the one provided

3) Screw in the male nipple valve

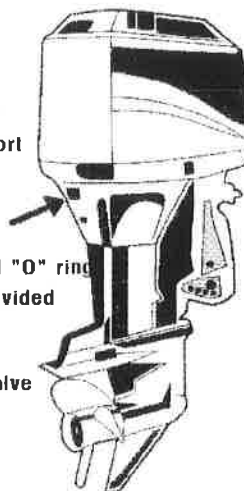

4) Attach female quick connect coupler to hose & flush